


LOG 50

715-07181a0224050

LOG 50 MOVA S EINSATZ LIGHT INSERT made of aluminium, white, similar to RAL 9016, decor white,high-efficiently vacuum deposited synthetic reflector beam 24°, accessoire: glass, light output direct, swiveling 350°, tilting 90°, with converter, max. 350mA, dimmability: not dimmable, through wiring 3x1,5mm², IP20



DRAWING

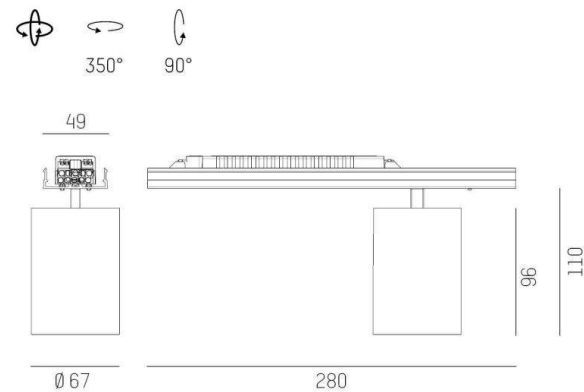

LIGHT DISTRIBUTION CURVE

TECHNICAL DETAILS

System perform. [W]	14
Bulb type	LED
Luminous flux [lm]	1490
Current sec. [mA]	350
Colour temp. [K]	4000K
CRI	>90
Optics	vacuum deposited synthetic reflector
Designer	INH0USE
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	24°
Voltage [V]	220-240V 50/60Hz
Through wiring	3x1,5mm²
Material	aluminium
Length [mm]	280
Width [mm]	67
Height [mm]	110
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	1,21
Color lamp	white
RAL	9016
Colour decor	white
EAN-Number	9010506410181
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	D
No. of luminaires B16A	50



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.