


# PILLE SINGLE L

737-200136gd

PILLE SINGLE L SD SURFACE MOUNTED CEILING LUMINAIRE made of mouth blown crystal glass, black, similar to RAL 9005, grey, light output direct, with converter, max. 350mA, dimmability: DALI, IP20




## DRAWING

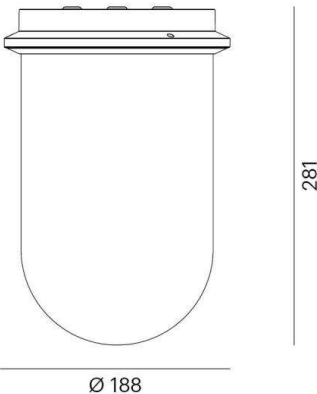

## TECHNICAL DETAILS

System perform. [W]	14
Bulb type	LED
Luminous flux [lm]	540
Current sec. [mA]	350
Colour temp. [K]	2700K
CRI	>90
Converter	with converter
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	mouth blown crystal glass
Height [mm]	281
Diameter [mm]	188
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	1,99
Color lamp	black
RAL	9005
Glass color	grey
EAN-Number	9010506451870
Lifetime [h]	50 000 L80 B10
Energy efficiency cl.	E
No. of luminaires B16A	50

## LIGHT DISTRIBUTION CURVE

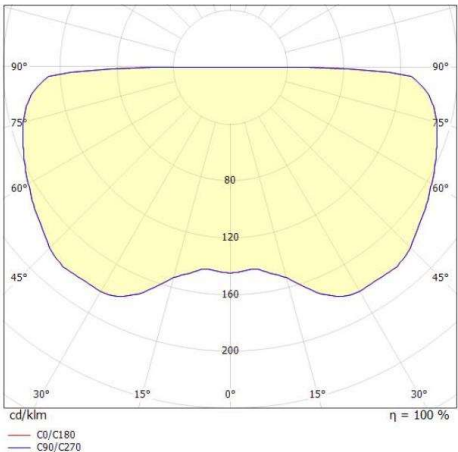

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.