



## TRIGGA

662-001020223150

TRIGGA SPOT VOLARE TRACK SPOTLIGHT WITH 2 PH VOLARE ADAPTER made of aluminium, white matt, similar to RAL 9016, anti-glare LF0 lens due to microfaceted structure beam 30°, light output direct, UGR <16, swiveling 350°, tilting 90°, with converter, max. 350mA, dimmability: not dimmable, adapter/ceiling base chrome, IP20

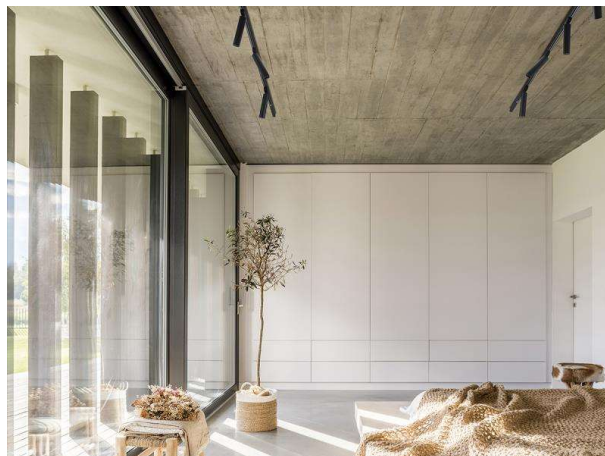


## DRAWING

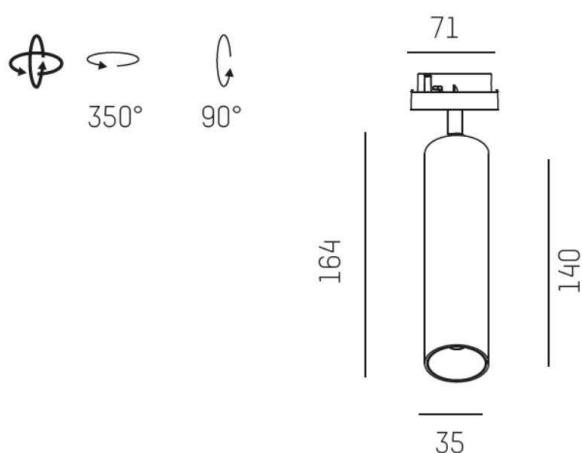

## TECHNICAL DETAILS

System perform. [W]	6
Bulb type	LED
Luminous flux [lm]	230
Current sec. [mA]	350
Colour temp. [K]	2700K
CRI	>90
UGR	<16
Optics	LF0 lens
Designer	Serge Cornelissen
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	30°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	164
Diameter [mm]	35
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,22
Color lamp	white matt
RAL	9016
Color adapter/ceiling base	chrome
EAN-Number	9008905768224
Lifetime [h]	L80 B10 S0 000
Energy efficiency cl.	6
No. of luminaires B16A	8

## LIGHT DISTRIBUTION CURVE

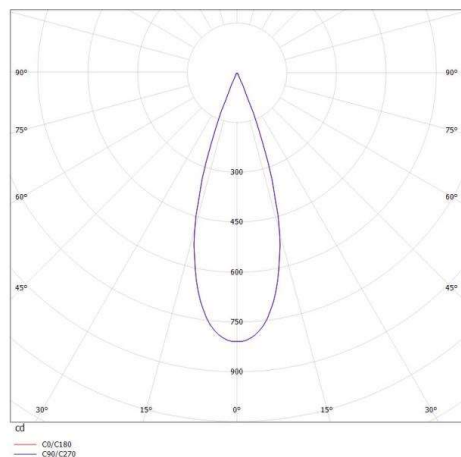

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.